

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220



B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

boway 10300


Material Designation

Boway Designation	boway 10300
UNS	C10300
EN	Cu-PHC
JIS	C1030
GB(China)	TUP0.003

Chemical Composition*

Cu	> 99.95	%
P	0.001-0.005	%

* Nominal composition

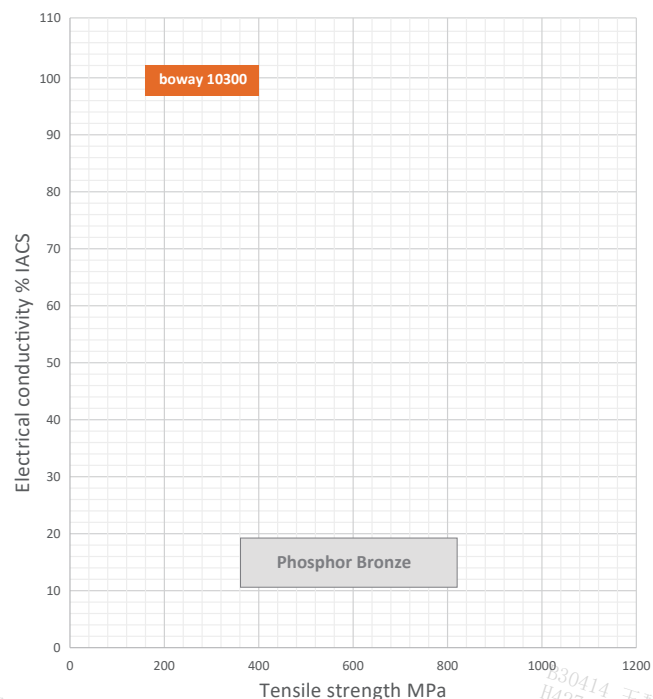

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

Application Target

Signal connector	Suitable
Power connector	Very suitable
Miniaturized connector	Not recommended
Switch/Relay	Suitable
Semiconductor	Suitable

Ideal for power connectors, busbar

Characteristics

This alloy is low phosphorus oxygen-free copper, no hydrogen embrittlement phenomenon. It has good weldability, corrosion resistance, and excellent molding properties.

Fabrication Properties

Cold forming	Very good
Machining	Average
Electroplating	Very good
Hot dip tinning	Very good
Laser welding	Less suitable
Resistance welding	Good
Soft soldering	Very good

Physical Properties*

Density	8.94	g/cm ³
Electrical conductivity@20°C	100	% IACS
conductivity@20°C	58	MS/m
Thermal conductivity@20°C	391	W/(m·K)
Specific heat capacity	0.385	J/(g·K)
Modulus of elasticity	115	GPa
Poisson's ratio	0.34	
Coefficient of thermal expansion**	17.7	10 ⁻⁶ /K

* Typical values at room temperature for reference

** Average value between 20-300°C

B30414 王琴理
H42745 Rev.2024.10
2025-12-26 14:24:24
10.110.6.220

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

boway 10300

Mechanical Properties (Values Underlined Are For Reference Only)

Temper	Tensile strength		Yield strength	Elongation	Hardness
	MPa	ksi	MPa	A50 %	HV0.2
R220(1/4H)	220-260	32-38	≤ 140	≥ 33	<u>40-70</u>
R240(1/2H)	240-300	35-44	≥ 180	≥ 8	<u>65-95</u>
R290(H)	290-360	42-52	≥ 250	≥ 4	<u>90-110</u>
R360(ESH)	≥ 360	≥ 52	≥ 320	≥ 2	<u>≥ 110</u>
Annealed	180-260	26-38	<u>70</u>	<u>35</u>	
H01*	235-290	34-42	<u>220</u>	<u>23</u>	
H02*	255-315	37-46	<u>255</u>	<u>20</u>	
H03*	285-345	41-50	<u>295</u>	<u>14</u>	
H04*	295-360	43-52	<u>310</u>	<u>9</u>	
H06*	325-385	47-56	<u>345</u>	<u>4</u>	
H08*	345-400	50-58	<u>360</u>	<u>3</u>	
H10*	≥ 360	≥ 52	<u>≥ 350</u>	<u>≤ 3</u>	

*According to ASTM B152

Bendability Bending thickness ≤ 0.5 mm; Bending width: 10 mm

Temper	90° R/T		180° R/T	
	Good Way	Bad Way	Good Way	Bad Way
R220	0	0	-	-
R240	0	0	-	-
R290	0	0	-	-
R360	0	0	-	-

90° bend test according to EN ISO7438, 180° bend test according to ASTM B820, shown values might show orange-peel, however no crack.

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

boway 10300


Packaging

Standard coils with outside diameters up to 1300 mm.
Traverse-wound coils with drum weights up to 500 kg.
Multiple-coil up to 3 tons.

Dimensions Available

Strip thickness 0.08–4.0 mm, other gauges on request.
Strip width from 8.5 mm.
Electroplated and hot-dip tinned strip available.

Electrical Conductivity

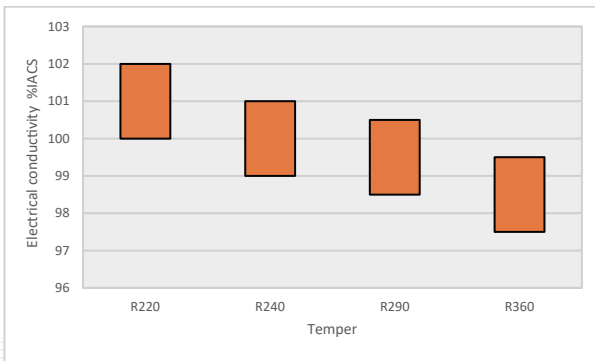

Fatigue Strength

The fatigue strength is defined as the maximum bending stress amplitude which a material withstands for 10,000,000 load cycles under symmetrical alternate load without breaking. It depends on the temper selected and can be estimated typically by 1/3 of tensile strength.

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220

B30414 王琴理
H42745
2025-12-26 14:24:24
10.110.6.220