

B30414 王琴理
H42745
2025-12-07 08:00:00
10.110.6.220

B30414 王琴理
H42745
2025-12-07 08:00:00
10.110.6.220

B30414 王琴理
H42745
2025-12-07 08:00:00
10.110.6.220

boway 51000 SG


Material Designation

Boway Designation	boway 51000 SG
UNS	C51000
EN	CuSn5
JIS	C5102
GB(China)	QSn5-0.2

Chemical Composition*

Sn	5	%
P	0.03-0.35	%
Cu	Rem.	

* Nominal composition

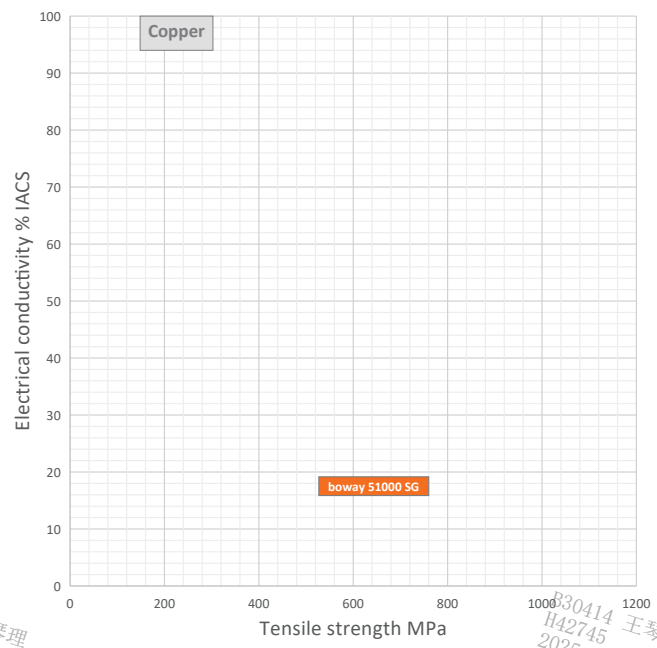

B30414 王琴理
H42745
2025-12-07 08:00:00
10.110.6.220

Application Target

Signal connector	Suitable
Power connector	Not recommended
Miniaturized connector	Suitable
Switch/Relay	Suitable
Semiconductor	Not recommended

B30414 王琴理
H42745
2025-12-07 08:00:00
10.110.6.220

Characteristics

Excellent formability and high strength combined with low sensitivity against stress corrosion cracking.
Very good corrosion resistance as well as excellent solderability.

B30414 王琴理
H42745
2025-12-07 08:00:00
10.110.6.220

Fabrication Properties

Cold forming	Very good
Machining	Average
Electroplating	Very good
Hot dip tinning	Very good
Laser welding	Good
Resistance welding	Good
Soft soldering	Very good

Physical Properties*

Density	8.85	g/cm ³
Electrical conductivity@20°C	18	% IACS
conductivity@20°C	10	MS/m
Thermal conductivity@20°C	96	W/(m·K)
Specific heat capacity	0.38	J/(g·K)
Modulus of elasticity	120	GPa
Poisson's ratio	0.33	
Coefficient of thermal expansion**	17.8	10 ⁻⁶ /K

* Typical values at room temperature for reference
** Average value between 20-300°C

B30414 王琴理
H42745 Rev.2024.10
2025-12-07 08:00:00
10.110.6.220

B30414 王琴理
H42745
2025-12-07 08:00:00
10.110.6.220

B30414 王琴理
H42745
2025-12-07 08:00:00
10.110.6.220

B30414 王琴理
H42745
2025-12-07 09:00:00
10.110.6.220

B30414 王琴理
H42745
2025-12-07 09:00:00
10.110.6.220



B30414 王琴理
H42745
2025-12-07 09:00:00
10.110.6.220

boway 51000 SG

Mechanical Properties (Values Underlined Are For Reference Only)

Temper	Tensile strength		Yield strength	Elongation	Hardness
	MPa	ksi	MPa	A50 %	HV
R525(H04)	525-625	76-91	≥ 510	≥ 9	<u>170-210</u>
R605(H06)	605-710	88-103	≥ 585	≥ 2	<u>180-220</u>
R655(H08)	655-760	95-110	≥ 635	≥ 1	<u>210-250</u>

*According to ASTM B888

Bendability Bending Thickness range: ≤0.4 mm , bending width: 10mm

Temper	90° R/T		180° R/T	
	Good Way	Bad Way	Good Way	Bad Way
R525(H04)	0	0.5	0.5	1
R605(H06)	0.5	1	1	1.5
R655(H08)	1	1.5	1.5	2.5

B30414 王琴理
H42745
2025-12-07 09:00:00
10.110.6.220

B30414 王琴理
H42745
2025-12-07 09:00:00
10.110.6.220

B30414 王琴理
H42745
2025-12-07 09:00:00
10.110.6.220

90° bend test according to EN ISO7438, 180° bend test according to ASTM B820, shown values might show orange-peel, however no crack.


Packaging

Standard coils with outside diameter up to 1300 mm.
Traverse-wound coils with drum weight up to 500 kg.
Multiple-coil up to 3 tons.

Dimensions Available

Strip thickness 0.08-0.4 mm, other gauges on request.
Strip width from 8.5 mm.
Electroplated and Hot-dip tinned strip available.

Electrical Conductivity

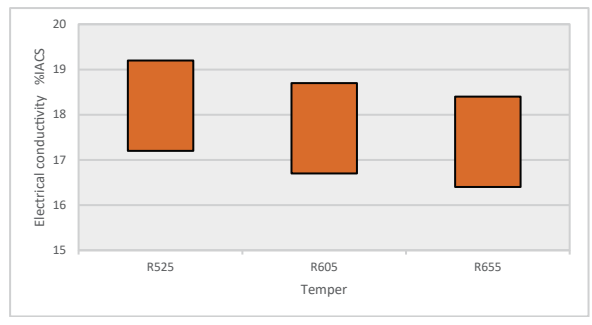

Fatigue Strength

The fatigue strength is defined as the maximum bending stress amplitude which a material withstands for 10,000,000 load cycles under symmetrical alternate load without breaking. It depends on the temper selected and can be estimated typically by 1/3 of tensile strength.

This datasheet is for your general information only and is not subject to revision. No claim can be derived from it unless there is evidence of intent or gross negligence. The data given is to our best knowledge, no warranty can be derived from the data provided. The given info may not replace the customers own tests.

B30414 王琴理
H42745
2025-12-07 09:00:00
10.110.6.220

B30414 王琴理
H42745
2025-12-07 09:00:00
10.110.6.220

B30414 王琴理
H42745
2025-12-07 09:00:00
10.110.6.220